

CAMS International

The *Drinking* Water Tank



Heat Resistance Technology.



Four layered tank protects water from heat upto 42° C.



Three layered tank protects water from heat upto 40° C.




Anti-microbial Treatment.




Longlasting tank with Unique longlasting 6 Pocket Design.

CROSS SECTION OF FOUR LAYERED CAMS INT TANK

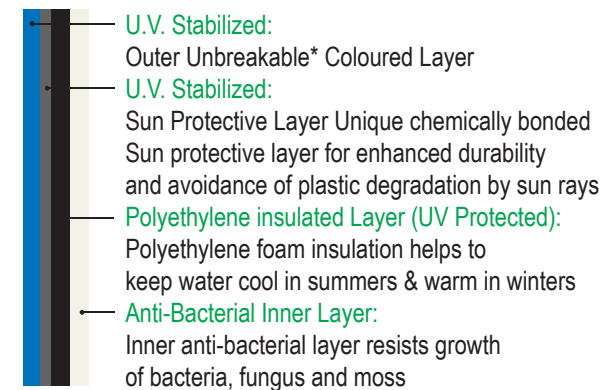


*Under Standard Test Condition

CROSS SECTION OF THREE LAYERED CAMS INT TANK

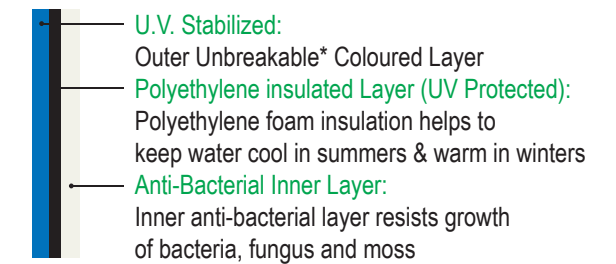

CROSS SECTION OF TWO LAYERED CAMS INT TANK

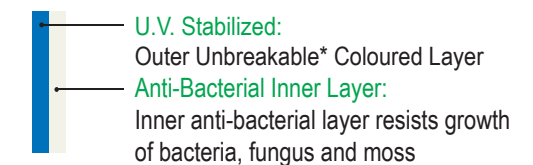

SL. NO.	CAPACITY (LTRS)	DIMENSION (in cm.)		
		DIAMETER	HEIGHT	MANHOLE SIZE
01	200 Ltrs	71.00	60.00	37.50
02	300 Ltrs	74.00	82.00	37.50
03	400 Ltrs	80.50	92.50	37.50
04	500 Ltrs	88.00	88.50	37.50
05	550 Ltrs	89.50	95.00	37.50
06	750 Ltrs	99.00	103.80	37.50
07	1000 Ltrs	109.00	115.50	37.50
08	1500 Ltrs	132.00	134.00	37.50
09	2000 Ltrs	145.50 / 133.00	150.00 / 168.50	49.00 / 37.50
10	2500 Ltrs	145.50	181.00	49.00
11	3000 Ltrs	145.50	212.00	49.00
12	4000 Ltrs	196.00	161.00	49.00
13	5000 Ltrs	196.00	198.50	49.00
14	7500 Ltrs	200.00	277.00	49.00
15	10000 Ltrs	210.00	322.00	49.00

FEATURES:

- Heat Resistance Technology. ■ Protects water from heat upto 42° C temperature and keeps the water cool. ■ Genuine LLDPE used as key ingredients. ■ The marble-like white inner layer with anti-bacterial treatment prevents moss and bad odour. ■ Unique foam-insulated lid with auto-locking and air-tight facilities. ■ 10% extra storing capacity.

* CIPET reports available on request

SHADES

